




DOUBLE-BALANCED MIXERS

M9-0942


Features

- LO/RF 9.0 to 42.0 GHz
- IF 1.0 to 22.0 GHz
- 10 dB Typical Conversion Loss
- Ultra-Broadband RF, LO, and IF
- 2.40 mm Connectors

Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	LO (GHz)	RF (GHz)	IF (GHz)	Min	Typ	Max	Diode Option LO drive level (dBm)
Conversion Loss (dB)	9.0-42.0	9.0-42.0	1.0-22.0		9	16	
Isolation (dB)							
LO-RF	9.0-42.0	9.0-42.0			See Plots		
LO-IF	9.0-42.0	9.0-42.0					
RF-IF	9.0-42.0	9.0-42.0					
Input 1 dB Compression (dBm)	9.0-42.0	9.0-42.0			+2 +6		L (+9 to +14) I (+14 to +18)
Input Two-Tone Third Order Intercept Point (dBm)	9.0-42.0	9.0-42.0			See Plot		L (+9 to +14) I (+14 to +18)

Part Number Options

Please specify diode level and package style by adding to model number.					
Package Styles		Examples			
		M9-0942LNV			
Connectorized	NV	M9-0942	L	NV	-2
Microstrip ^{1,2}	ES	(Model)	(Diode Option)	(Package)	(I-Port Configuration)

¹Connectorized test fixtures available for most carrier and surface mount packages. Consult factory.

²For non-connectorized packages, specify I-port configuration by adding -1 or -2 suffix to model number. Default is -2 configuration when not specified.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com



DOUBLE-BALANCED MIXERS









Page 2

M9-0942

LO/RF 9.0 to 42.0 GHz

IF 1.0 to 22.0 GHz

Typical Performance

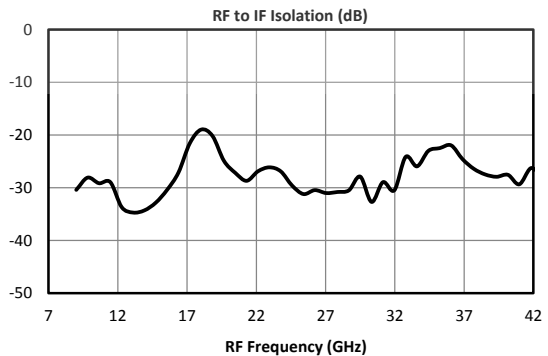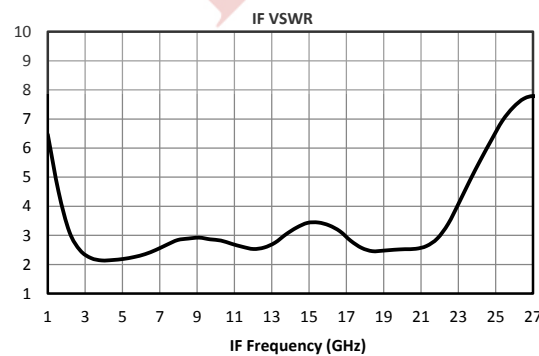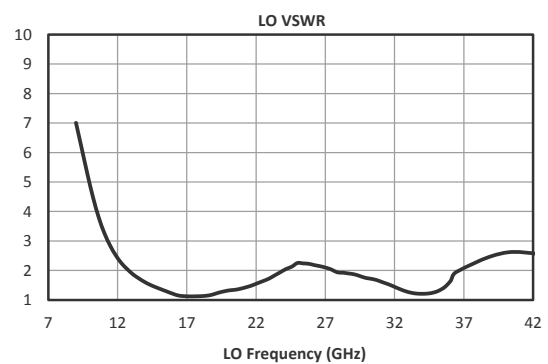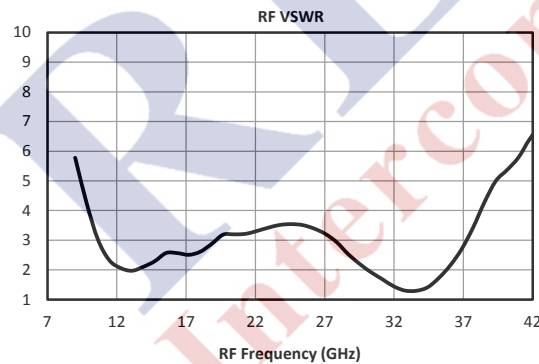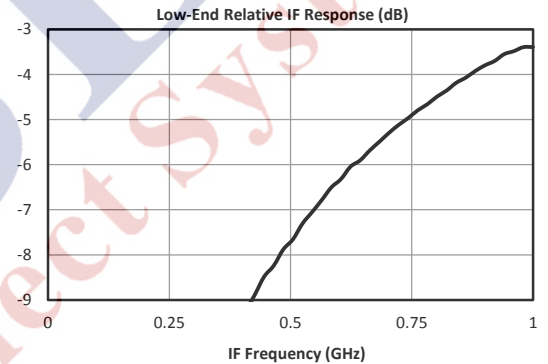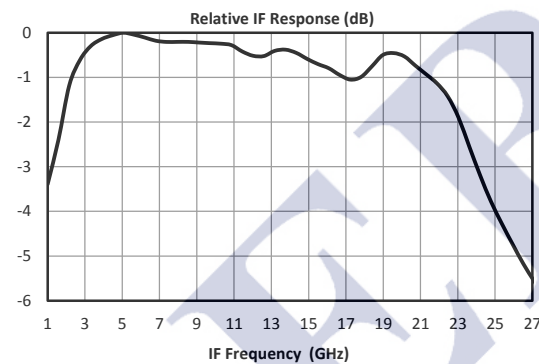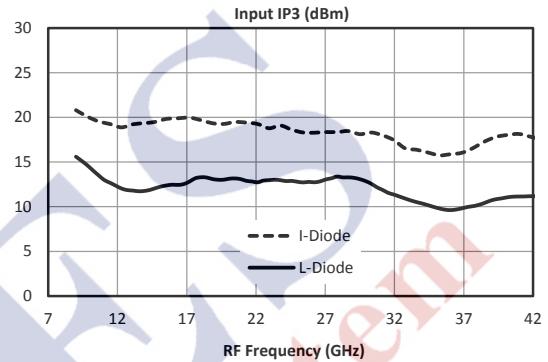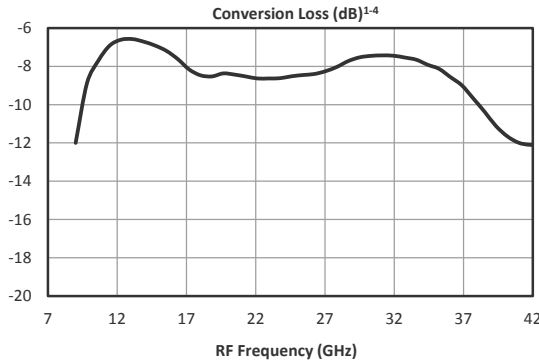









DOUBLE-BALANCED MIXERS

Page 3

M9-0942

LO/RF 9.0 to 42.0 GHz
IF 1.0 to 22.0 GHz

Typical Performance

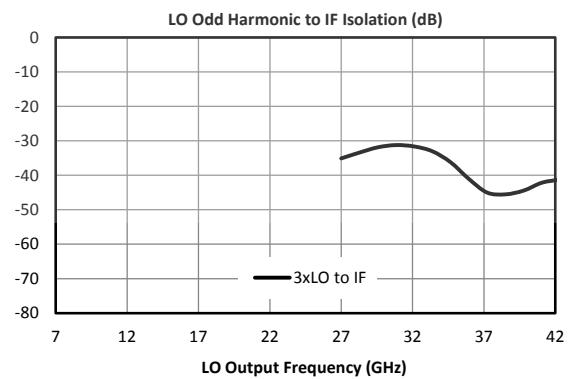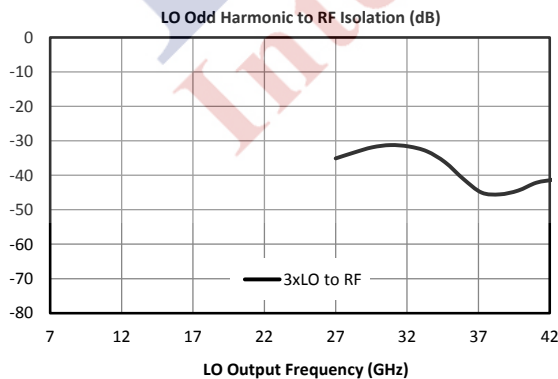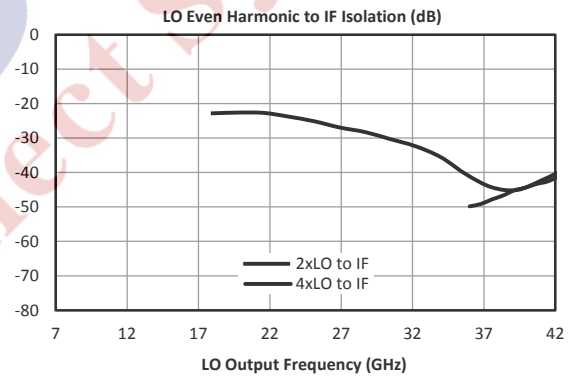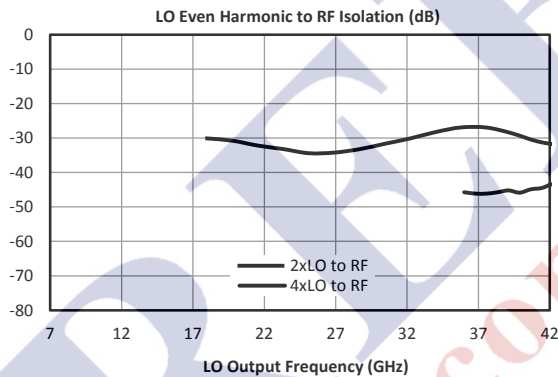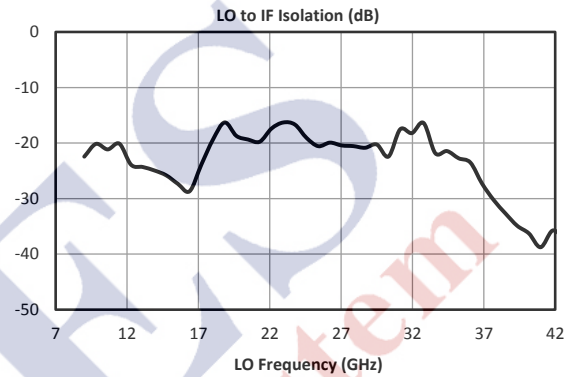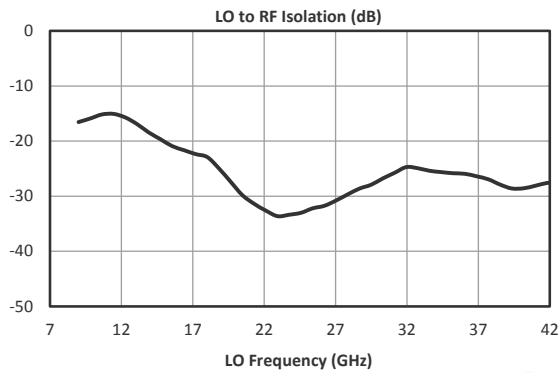



DOUBLE-BALANCED MIXERS

Page 4

M9-0942

**LO/RF 9.0 to 42.0 GHz
IF 1.0 to 22.0 GHz**


Downconversion Spurious Suppression

Spurious data is taken by selecting RF and LO frequencies ($\pm m\text{LO} \pm n\text{RF}$) within the 9 to 42 GHz RF/LO bands, which create a 2.0 GHz IF spurious output. The mixer is swept across the spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by $(n-1)$, where “n” is the RF spur order. For example, the $2\text{RF} \times 2\text{LO}$ spur is 55 dBc for a -10 dBm input (I-Diode), so a -20 dBm RF input creates a spur that is $(2-1) \times (-10 \text{ dB})$ dB lower, or 65 dBc.

Typical Downconversion Spurious Suppression (dBc): I-Diode (L-Diode) ⁵

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xRF	-----	See LO to IF Isolation and LO Harmonic to IF Isolation Plots (Page 3)				
1xRF	18 (18)	Reference	30 (30)	14 (13)	32 (32)	22 (27)
2xRF	56 (52)	56 (55)	55 (52)	59 (49)	54 (42)	60 (53)
3xRF	79 (78)	53 (50)	77 (72)	66 (58)	84 (72)	66 (56)
4xRF	105 (105)	90 (92)	94 (84)	100 (89)	100 (87)	106 (91)
5xRF	117 (115)	104 (101)	114 (106)	106 (89)	118 (107)	111 (98)

A sample downconversion spurious sweep is shown below. An LO which is 2.0 GHz higher than the RF is used to create a 2.0 GHz reference IF. A second LO is used to create a 2×2 spurious IF, also at 2.0 GHz (1.0 GHz fundamental IF). The difference between these two output levels is the spurious suppression in dBc. The mean value across the 9 to 40 GHz RF input band is the number shown in the table above.

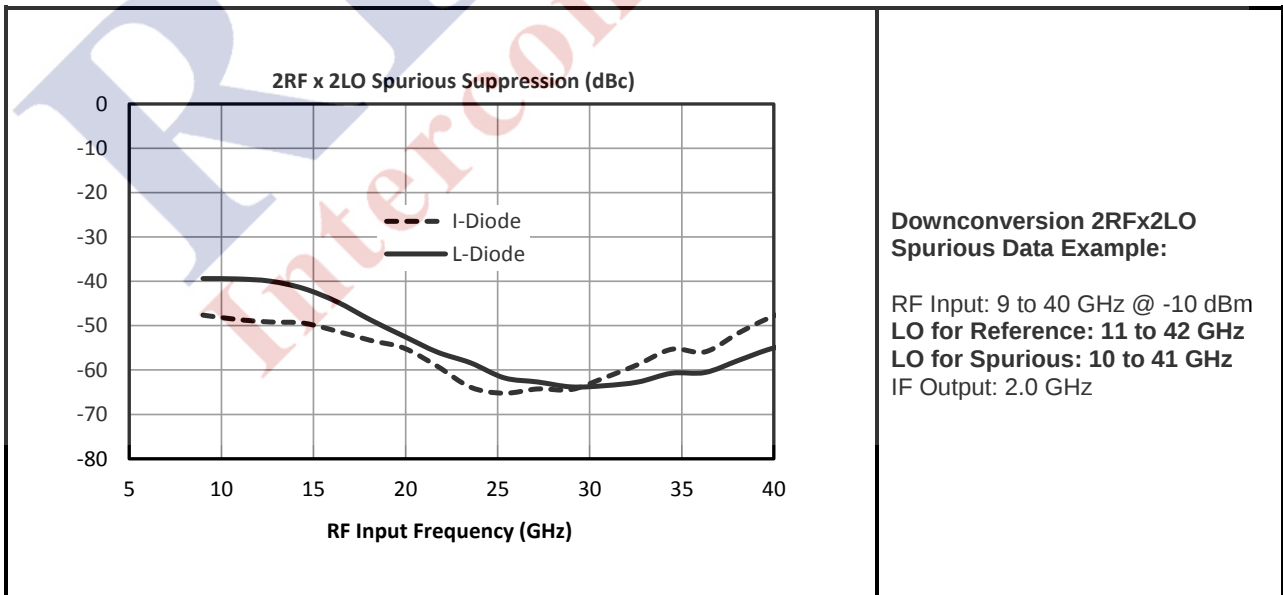



DOUBLE-BALANCED MIXERS

Page 5

M9-0942

LO/RF 9.0 to 42.0 GHz
IF 1.0 to 22.0 GHz


Upconversion Spurious Suppression

Spurious data is taken by mixing a 2.0 GHz IF with LO frequencies ($\pm m\text{LO} \pm n\text{IF}$) which create an RF within the 9 to 42 GHz RF band. The mixer is swept across the spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by $(n-1)$, where “n” is the IF spur order. For example, the $2\text{IF} \times 1\text{LO}$ spur is typically 57 dBc for a -10 dBm input (I-Diode), so a -20 dBm IF input creates a spur that is $(2-1) \times (-10 \text{ dB})$ dB lower, or 67 dBc.

Typical Upconversion Spurious Suppression (dBc): I-Diode (L-Diode) ⁵

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xIF	-----	See LO to RF Isolation and LO Harmonic to RF Isolation Plots (Page 3)				
1xIF	18 (20)	Reference	27 (26)	12 (11)	31 (33)	36 (30)
2xIF	57 (50)	57 (58)	56 (60)	54 (44)	50 (55)	52 (48)
3xIF	90 (81)	77 (68)	87 (76)	68 (61)	79 (72)	72 (69)
4xIF	116 (98)	109 (106)	110 (98)	100 (94)	101 (92)	95 (83)
5xIF	127 (126)	123 (119)	129 (122)	118 (109)	118 (108)	113 (102)

A sample upconversion spurious sweep is shown below. A 2.0 GHz reference IF input is used to create an RF output that is 2.0 GHz below the LO input ($\text{LO} - \text{IF} = \text{RF}$). A second LO (2.0 GHz higher) is combined with the same 2.0 GHz IF input ($\text{LO} - 2 \times \text{IF} = \text{RF}$) to create the same 9 to 38 GHz RF output band. The difference between these two output levels is the spurious suppression in dBc. The mean value across the RF output band is the number shown in the table above.

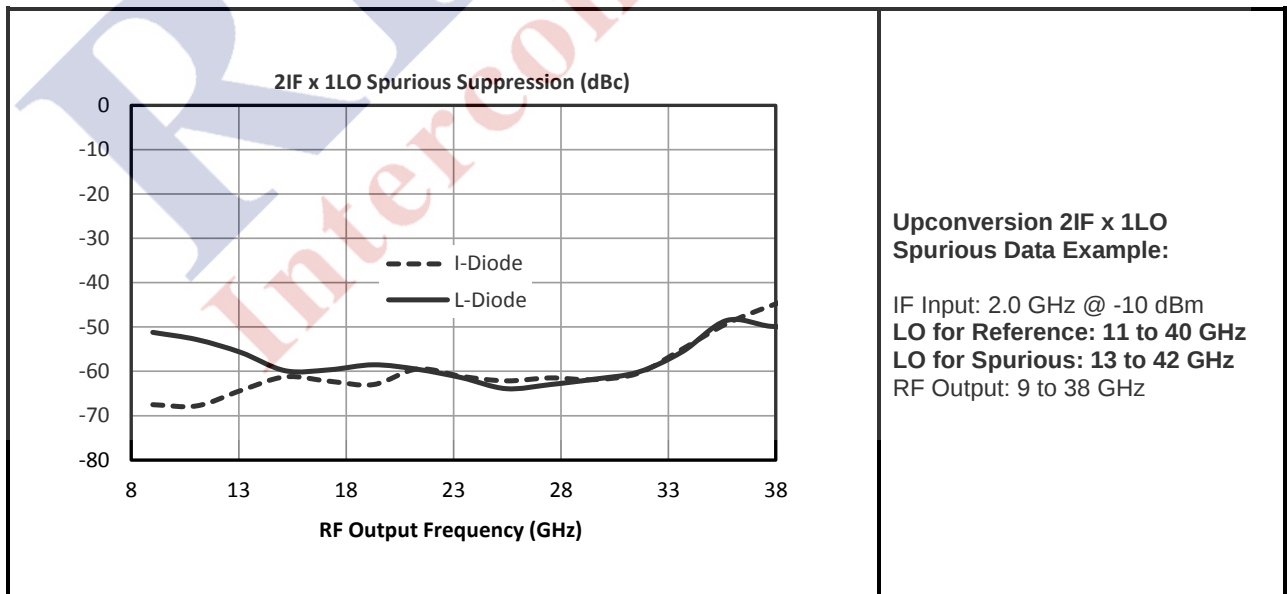

**DOUBLE-BALANCED MIXERS****M9-0942**

Page 6

LO/RF 9.0 to 42.0 GHz
IF 1.0 to 22.0 GHz

Port	Description	DC Interface Schematic
LO	The LO port is DC coupled to ground and AC matched to 50 Ohms from 9 to 42 GHz. Blocking capacitor is optional.	
RF	The RF port is DC coupled to ground and AC matched to 50 Ohms from 9 to 42 GHz. Blocking capacitor is optional.	
IF	The IF port is DC coupled to ground and AC matched to 50 Ohms from 1 to 22 GHz. Blocking capacitor is optional.	

Absolute Maximum Ratings	
Parameter	Maximum Rating
RF DC Current	1 Amp
LO DC Current	1 Amp
IF DC Current	1 Amp
RF Power Handling (RF+LO)	+23 dBm at +25°C, derated linearly to +20 dBm at +100°C
Operating Temperature	-55°C to +100°C
Storage Temperature	-65°C to +125°C
ESD Sensitivity (HBM)	Class 0

DATA SHEET NOTES:

1. Mixer Conversion Loss Plot IF frequency is 4.0 GHz.
2. Mixer Noise Figure typically measures within 0.5 dB of conversion loss.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Unless otherwise specified, L-diode data is taken with +11 dBm LO drive, and I-diode data is taken with +16 dBm drive.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com
www.markimicrowave.com