



MODEL 500520010


0.5-20 GHz DUAL-DIRECTIONAL COUPLER



SPECIFICATIONS

FREQUENCY RANGE	0.5-20 GHz
COUPLING (with respect to input)	
Nominal	10 ± 1.0 dB
Frequency Sensitivity	± 0.85 dB
DIRECTIVITY	12 dB
MAXIMUM VSWR	1.4
INSERTION LOSS	3.0 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	7.0
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS

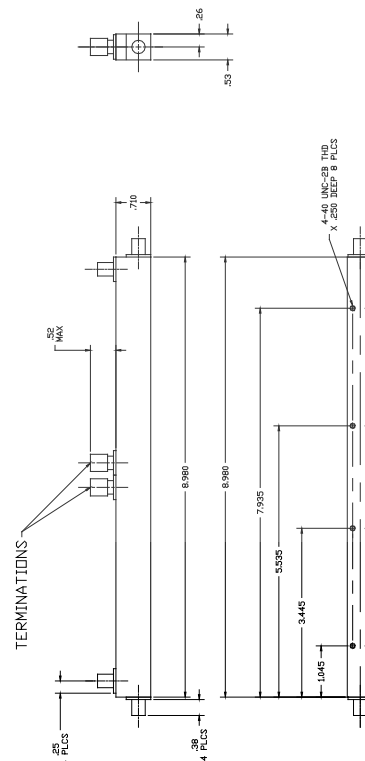

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com

5/16