




MODEL 501820


1-20 GHz DUAL-DIRECTIONAL COUPLER

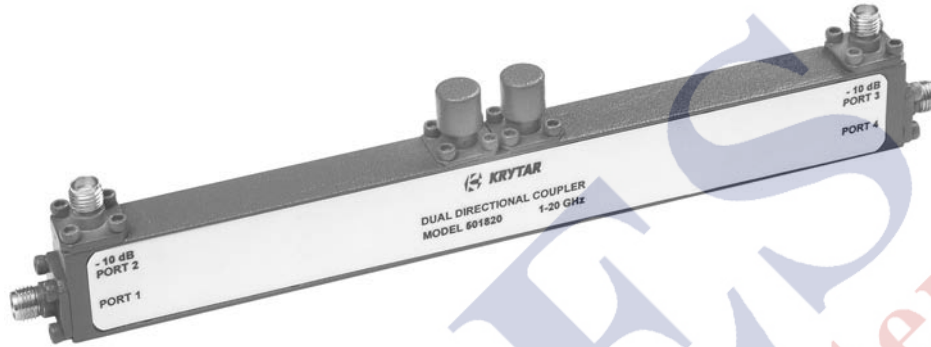

SPECIFICATIONS

FREQUENCY RANGE	1-20 GHz
COUPLING	
Nominal	10 $\pm$ 1.0 dB
Frequency Sensitivity	$\pm$ 0.5 dB
DIRECTIVITY	> 15 dB
MAXIMUM VSWR (any port)	1.4
INSERTION LOSS (includes coupled power)	< 2.8 dB
POWER RATING (input)	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	4.6
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS

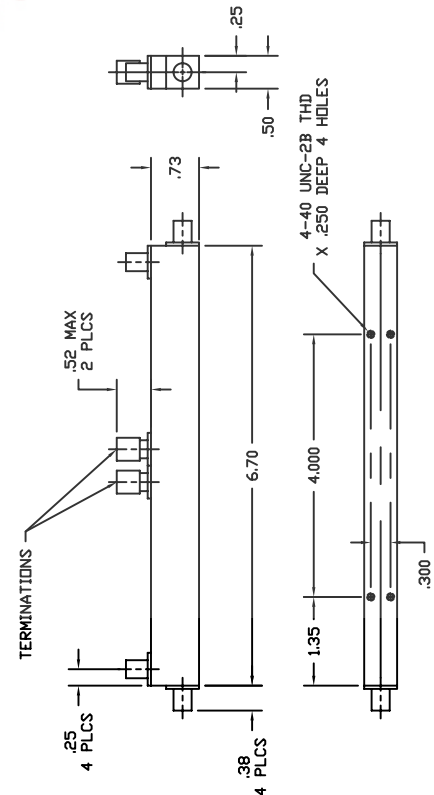

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com