

SWP-27340304-28-E1-3

Advanced

WR-28 Waveguide Power Divider, 4-Way, Inline, 26.5 to 40 GHz

Description:

Model SWP-27340304-28-E1-3 is a WR-28, 4-way power divider that operates from 26.5 to 40 GHz. The power divider offers a typical insertion loss of 0.5 dB and typical isolation of 20 dB. All ports are well-balanced and in-phase for power dividing or combining applications across the band. The power divider is configured as an inline package with WR-28 waveguides and UG-599/U compatible flanges at all ports. The input or output port orientation can be converted from a H-plane to E-plane configuration by installing Eravant's standard compact 90° twist, model **SWB-28090-TB-C**. A right angle, 4-way configuration is offered under model **SWP-27340304-28-S1-3**. Other power splitting options, such as 2-way, 8-way, and 16-way division, are available for both right-angle and inline configurations under different model numbers.



Features:

- Full Band Performance
- Low Insertion Loss
- High Isolation
- Compact Package
- 90° twist compatible

Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		40 GHz
Insertion Loss		0.5 dB	
Power Unbalance		±0.4 dB	
Adjacent Port Isolation		20 dB	
Non-Adjacent Port Isolation		30 dB	
Return Loss		15 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
RF Ports	WR-28 Waveguide with UG-599/U Compatible Flange
Material	Aluminum
Finish	Gold Plated
Weight	8.7 oz.
Outline	WP-A4I-4



www.eravant.com | 501 Amapola Ave, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@eravant.com

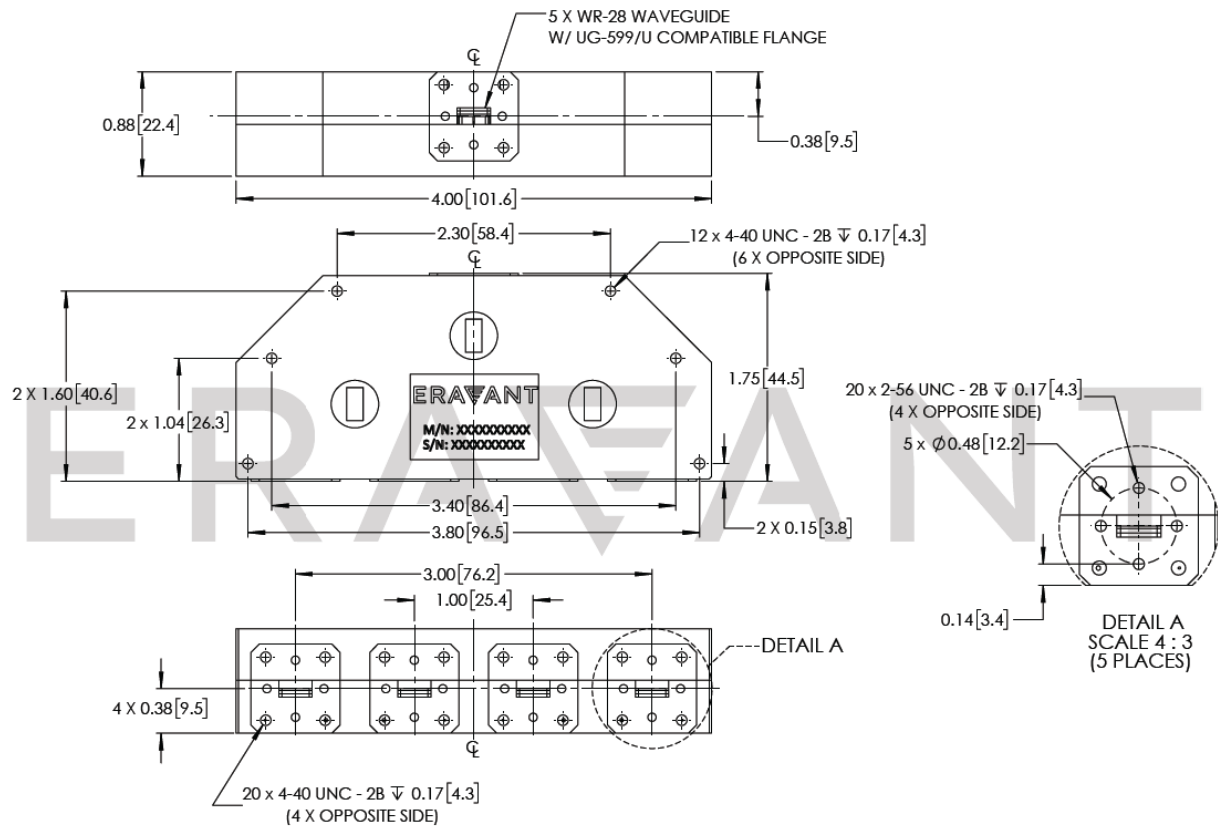


SAGE Millimeter, Inc.

SWP-27340304-28-E1-3

Advanced

WR-28 Waveguide Power Divider, 4-Way, Inline, 26.5 to 40 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])**Note:**

- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will degrade performance and/or damage the device.

