

RF BAY, Inc.

www.rfbayinc.com

LPA-2-20**LPA Series****50MHz – 3000MHz RF Amplifier****Features**

- Frequency Range: 50-3000MHz
- Gain: 21dB
- P_{1dB} : +8dBm
- IP3: +18dBm
- Noise Figure: 6.5dB
- DC Power: 3V/28mA
- SMA Connector

Performance Test @ 1500MHz

Description

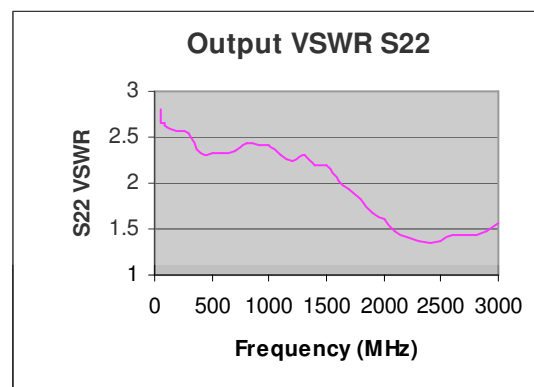
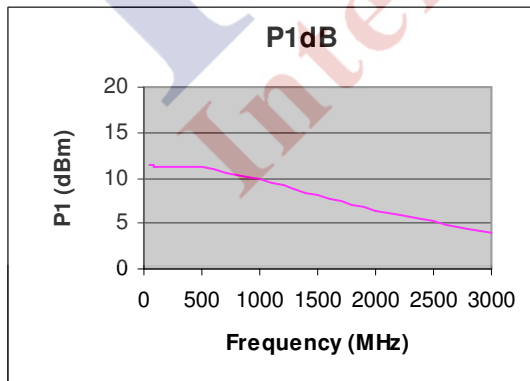
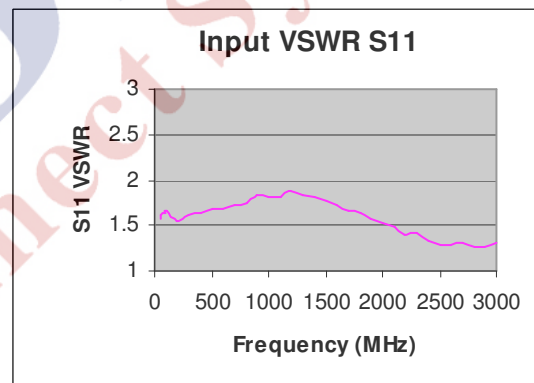
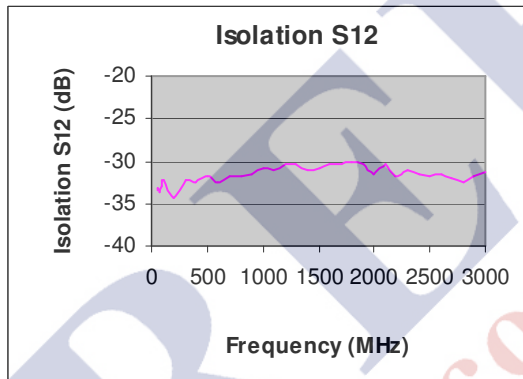
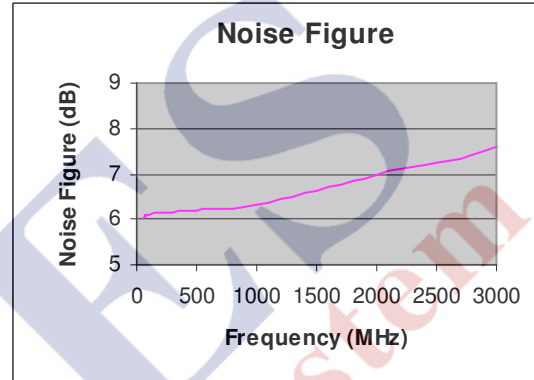
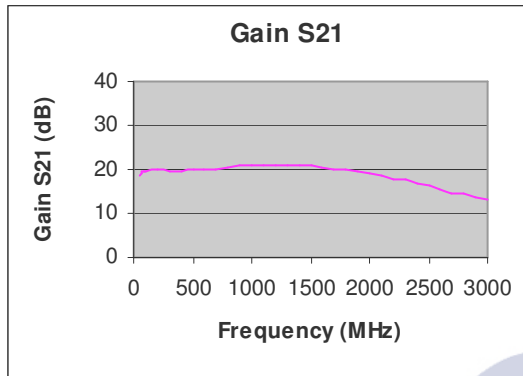
LPA-2-20 is a wideband low voltage RF Amplifier operates with frequency range from 50MHz to 3000MHz.

Picture**Electrical Specifications @ +25 °C, $Z_S = Z_L = 50 \Omega$, $V_{CC} = +3V$**

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	50		3000
Gain $f = 50$ MHz	dB		18.5	
$f = 500$ MHz	dB		20.0	
$f = 1000$ MHz	dB		21.0	
$f = 1500$ MHz	dB		21.0	
$f = 2000$ MHz	dB		19.0	
$f = 2500$ MHz	dB		16.5	
$f = 3000$ MHz	dB		13.0	
P_{1dB} at 1500MHz	dBm		+8	
P_{SAT} at 1500MHz	dBm		+10	
IP3 at 1500MHz	dBm		+18	
Noise Figure at 1500MHz	dB		6.5	8.0
Reverse Isolation	dB		-30	
VSWR Input VSWR			1.8:1	
Output VSWR			2.2:1	
DC Power Supply	V	2.7	3.0	3.3
Supply Current	mA		28	

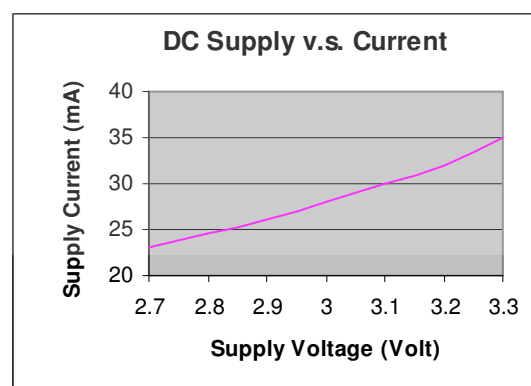
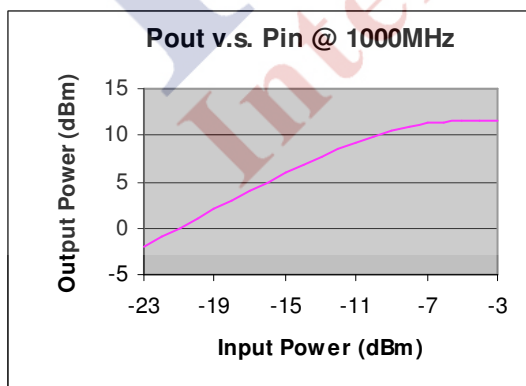
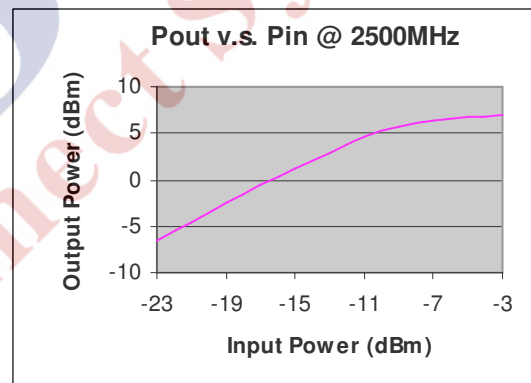
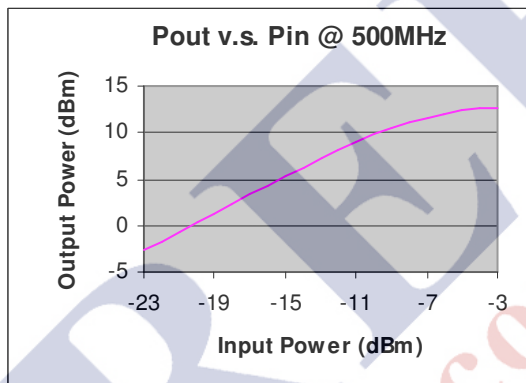
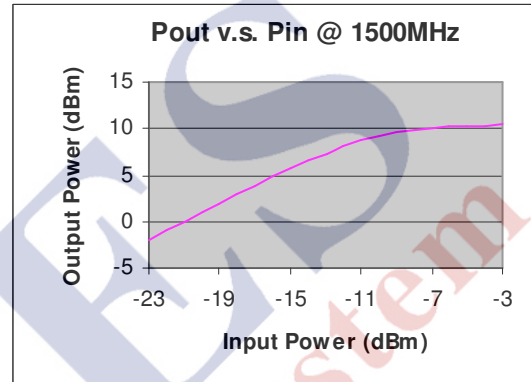
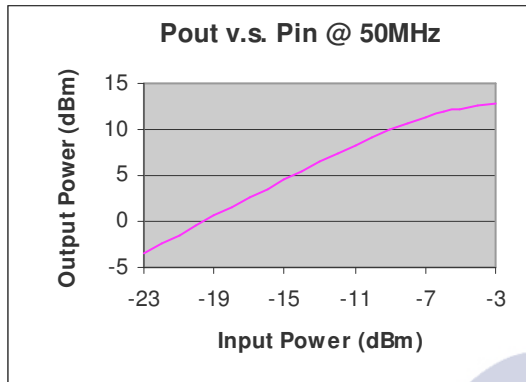
RF BAY, Inc.

www.rfbayinc.com

LPA-2-20**LPA Series****50MHz – 3000MHz RF Amplifier****Typical Performance @ +25 °C**

RF BAY, Inc.

www.rfbayinc.com

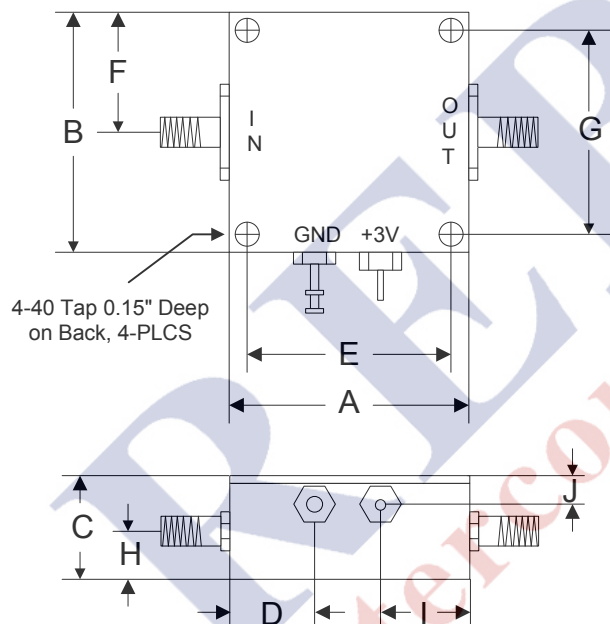
LPA-2-20**LPA Series****50MHz – 3000MHz RF Amplifier****Typical Performance @ +25 °C**

RF BAY, Inc.

www.rfbayinc.com

LPA-2-20**LPA Series****50MHz – 3000MHz RF Amplifier****Absolute Maximum Ratings**

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+3.6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76