

RF BAY, Inc.

www.rfbayinc.com

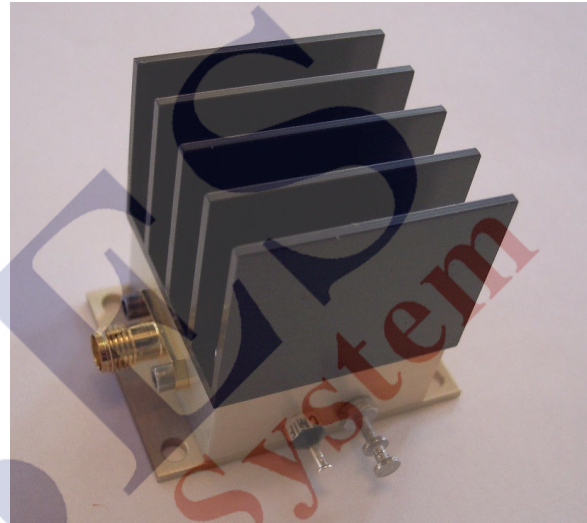
MGA-1750**MGA Series****1.5GHz –2.0GHz 1W RF Amplifier****Features**

- Frequency Range: 1.5 – 2.0GHz
- Gain: 25dB
- P_{out} : +30dBm
- IP3: +39dBm
- Noise Figure: 7.3dB
- Input VSWR: 1.4:1
- DC Power: 5V
- SMA Connector

Performance Tested @ 1.75GHz

Description

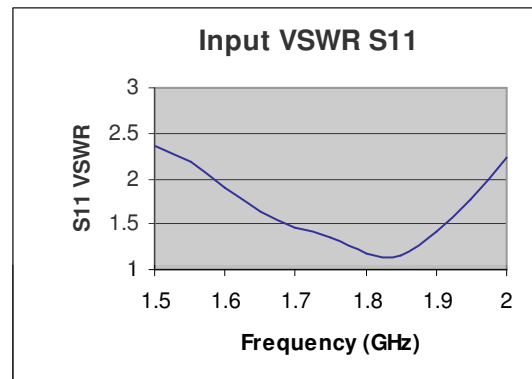
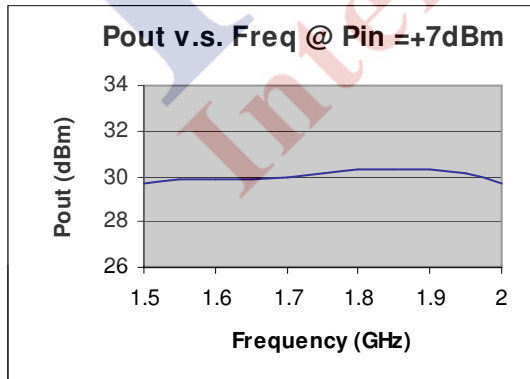
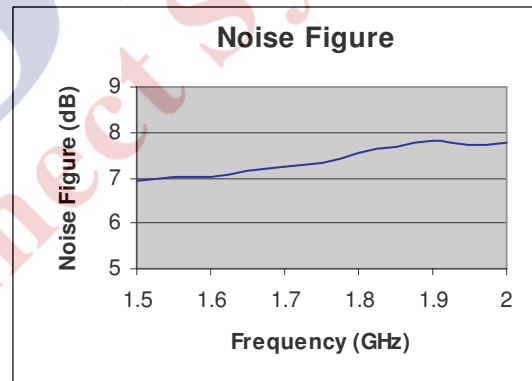
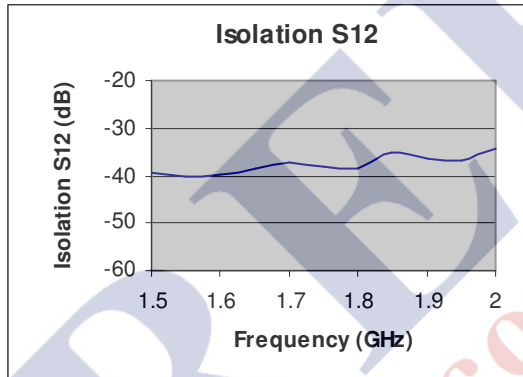
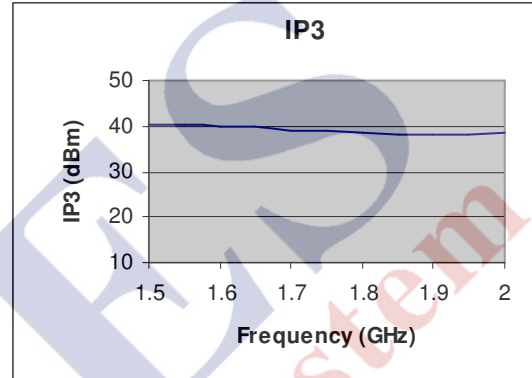
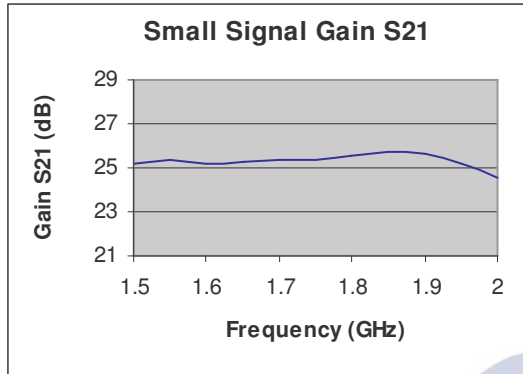
MGA-1750 is +30dBm (1W) output RF Amplifier operates with frequency range from 1.5GHz to 2.0GHz.

Picture**Electrical Specifications @ +25 °C, $Z_s = Z_L = 50 \Omega$, $V_{cc}=+5V$**

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	1.5		2.0
Small Signal Gain $f = 1.50\text{GHz}$	dB		25.2	
$f = 1.65\text{GHz}$	dB		25.2	
$f = 1.75\text{GHz}$	dB		25.3	
$f = 1.90\text{GHz}$	dB		25.5	
$f = 2.00\text{GHz}$	dB		24.5	
Gain Flatness	dB		± 1.0	
P_{out} @ $P_{in} = +7\text{dBm}$	dBm		+30	
OIP3	dBm		+39	
Noise Figure at 1.75GHz	dB		7.3	
Reverse Isolation	dB		-38	
VSWR Input			1.4:1	
DC Power Supply	V	4.5	5.0	5.5
Supply Current Quiescent (no RF)	mA		460	
@ $P_{out} = +30\text{dBm}$	mA		530	

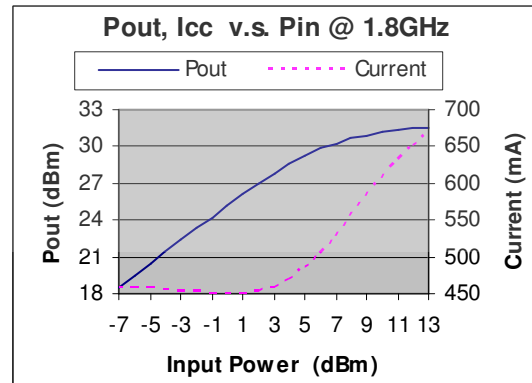
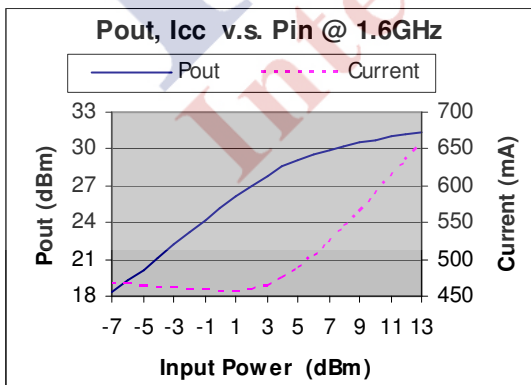
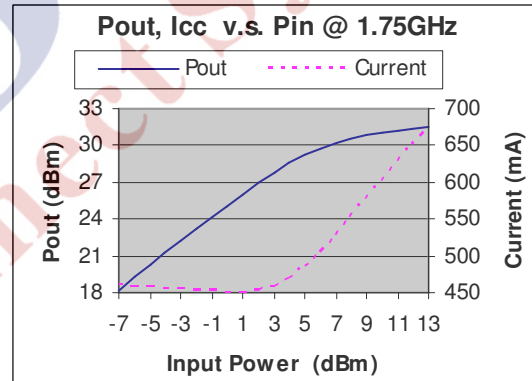
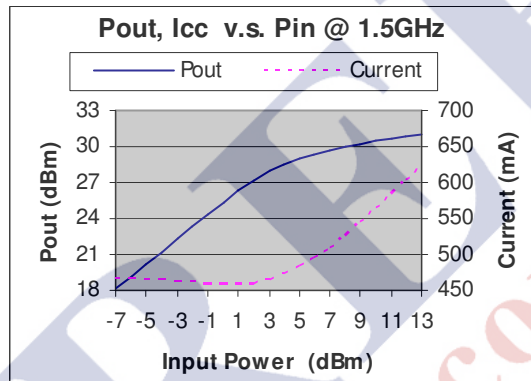
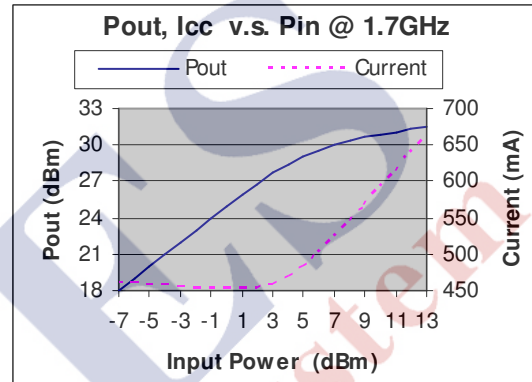
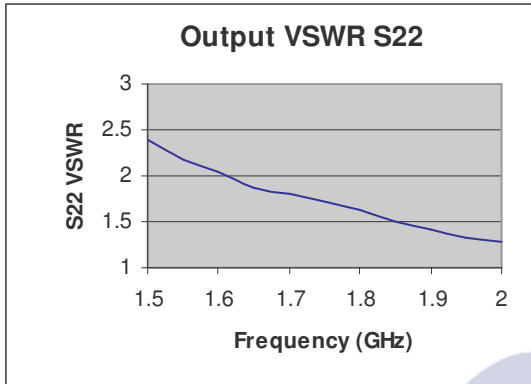
RF BAY, Inc.

www.rfbayinc.com

MGA-1750**MGA Series****1.5GHz –2.0GHz 1W RF Amplifier****Typical Performance @ +25 °C**

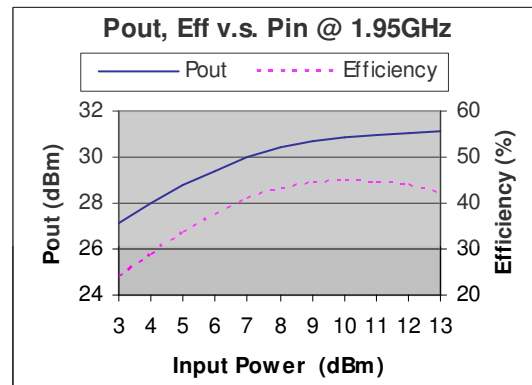
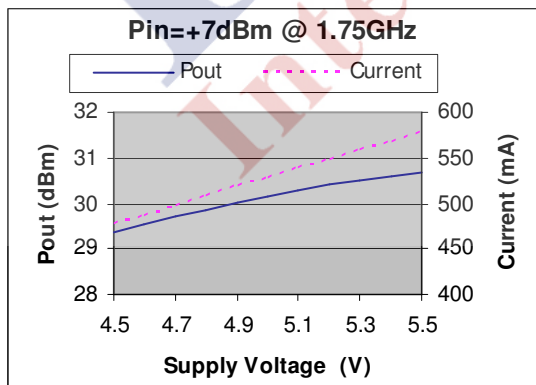
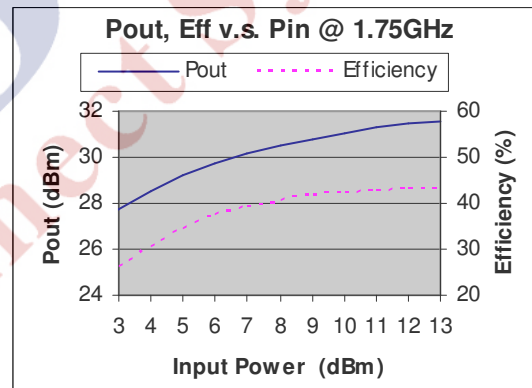
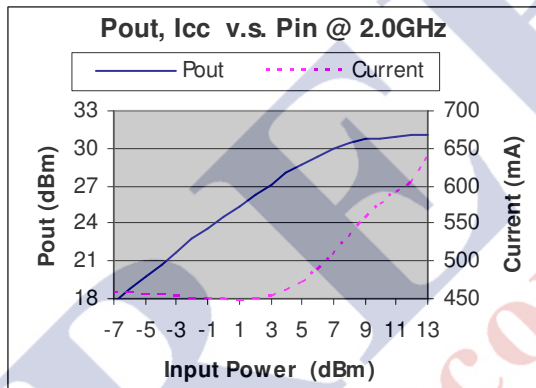
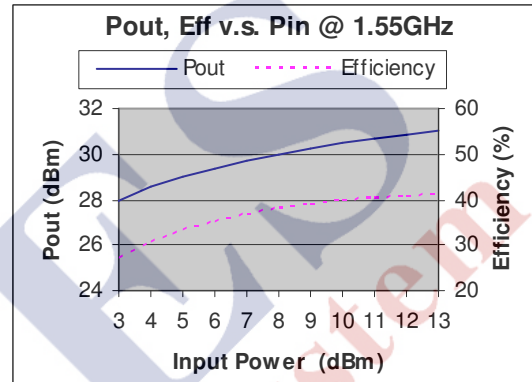
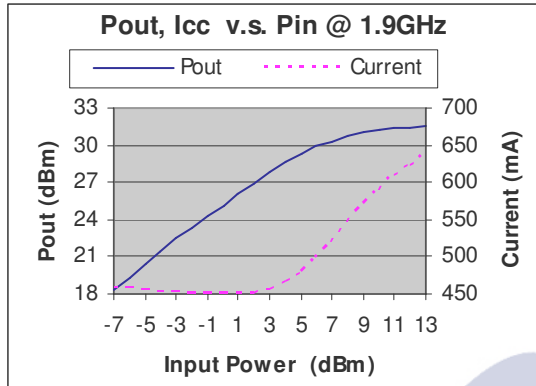
RF BAY, Inc.

www.rfbayinc.com

MGA-1750**MGA Series****1.5GHz –2.0GHz 1W RF Amplifier****Typical Performance @ +25 °C**

RF BAY, Inc.

www.rfbayinc.com

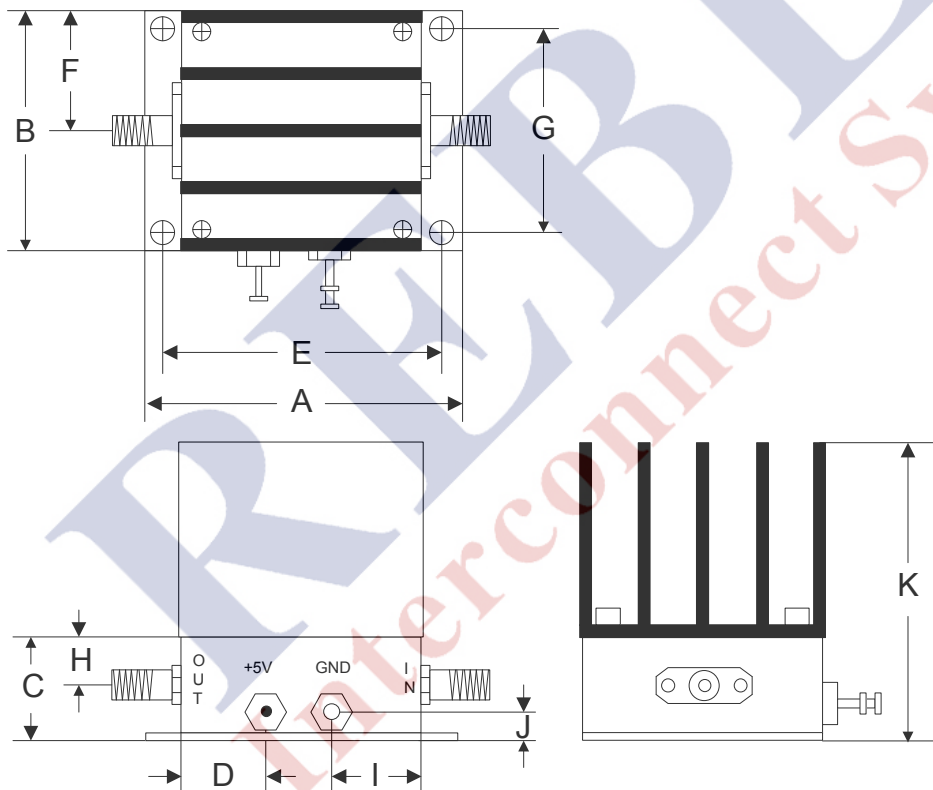
MGA-1750**MGA Series****1.5GHz –2.0GHz 1W RF Amplifier****Typical Performance @ +25 °C**

RF BAY, Inc.

www.rfbayinc.com

MGA-1750**MGA Series****1.5GHz –2.0GHz 1W RF Amplifier****Absolute Maximum Ratings**

Parameter	Absolute Maximum
RF Input Power	+16dBm
Supply Voltage	+6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

	A	B	C	D	E	F	G	H	I	J	K
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187	1.563
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76	39.70