


SWP-71386304-12-E1

Rev. 1.0

4-Way Waveguide Power Divider, 71 to 86 GHz

Description:

Model SWP-71386304-12-E1 is an E band, 4-way power divider with a typical insertion loss of 0.8 dB across the frequency range of 71 to 86 GHz. The divider offers 25 dB isolation and well balanced ports, which can be used for in-phase power dividing or combining. This power divider comes as an in-line configuration with WR-12 waveguides and UG-387/U flanges at the input and all outputs.

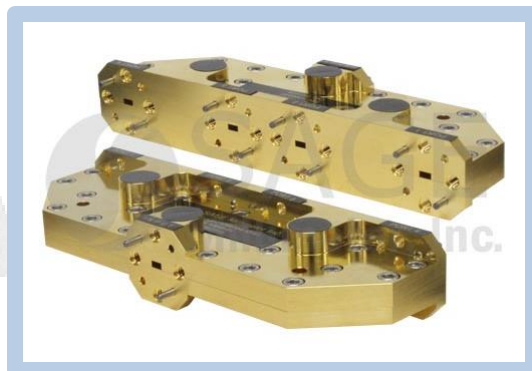

Features:

- Low Insertion Loss
- High Isolation
- Inline Configuration

Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	71 GHz		86 GHz
Insertion Loss		0.8 dB	1.0 dB
Power Unbalance		±0.4 dB	±0.5 dB
Isolation (Adjacent Ports)		15 dB	
Isolation (Non-adjacent Ports)		25 dB	
Input/ Output Return Loss		1.2:1	1.5:1
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Input Port	WR-12 Waveguide with UG-387/U Flange
Output Port	WR-12 Waveguide with UG-387/U Flange
Material	Aluminum
Finish	Gold Plated
Weight	3.6 Oz
Dimensions	4.30" (W) x 1.30" (L) x 0.75" (H)
Port Separations	1.35" and 0.80"
Outline	WP-E4I




SWP-71386304-12-E1


Rev. 1.0

4-Way Waveguide Power Divider, 71 to 86 GHz

Typical Insertion Loss and Isolation vs. Frequency

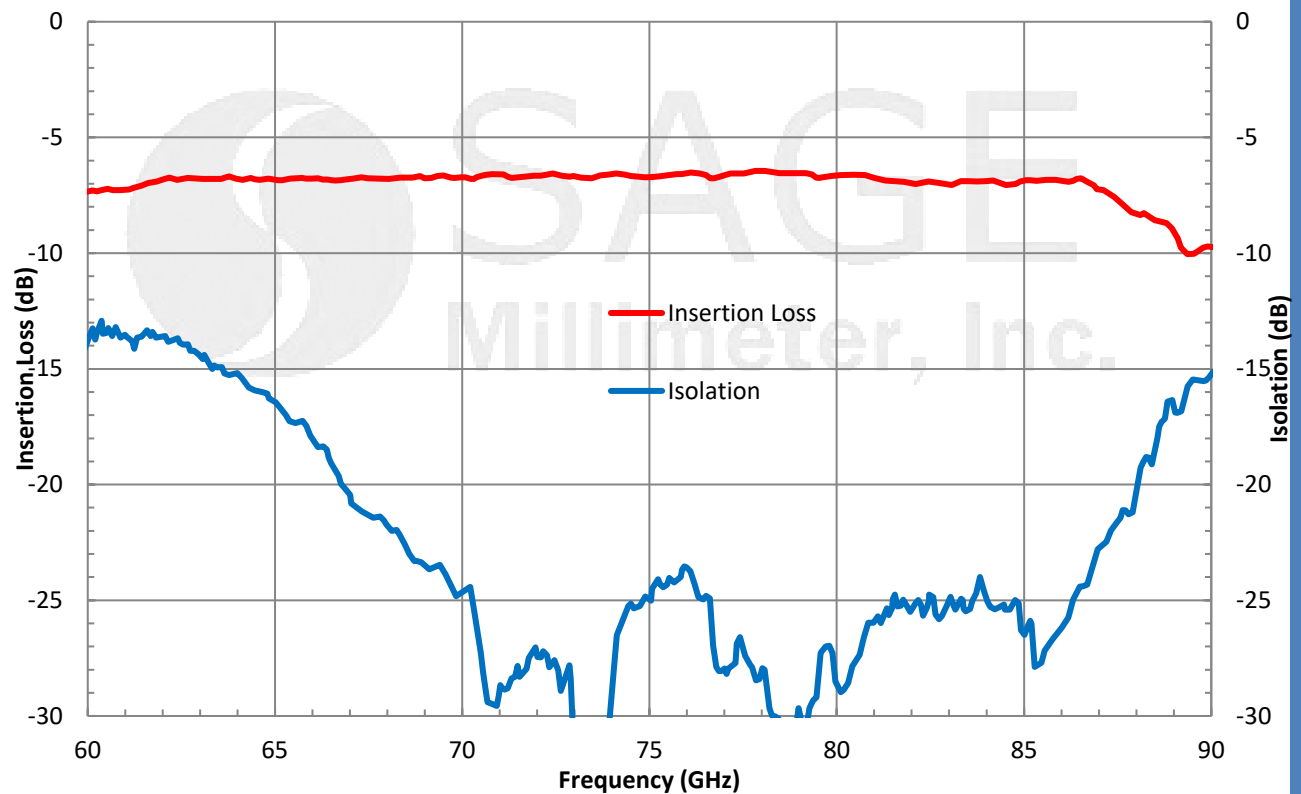

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

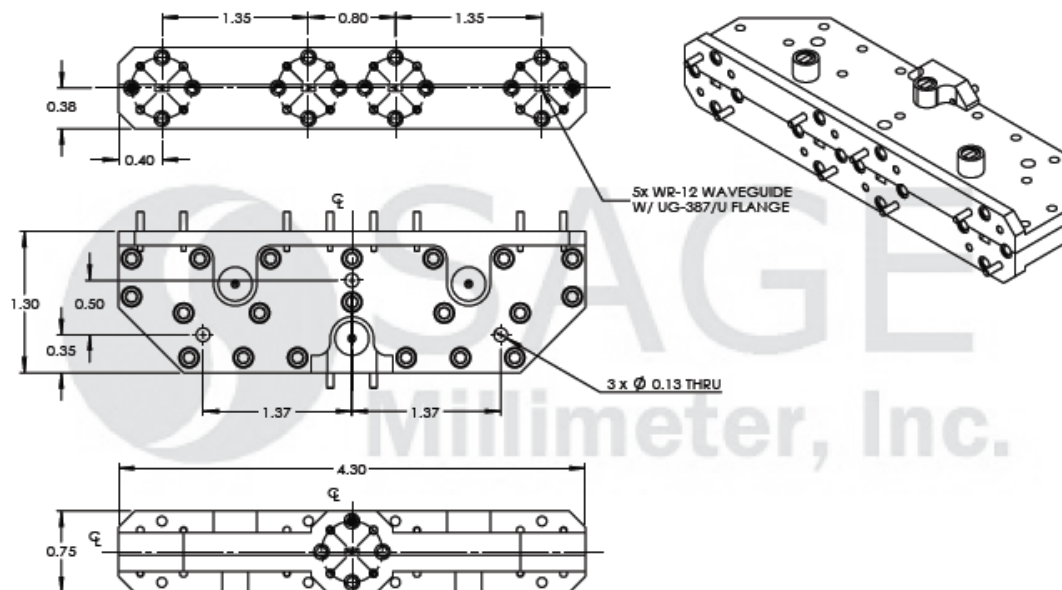

SWP-71386304-12-E1

Rev. 1.0

4-Way Waveguide Power Divider, 71 to 86 GHz

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

