

NOTES:


1. INTERPRET CALLOUTS/SYMBOLS PER ASME Y14.5M-1994
2. RECOMMENDED MATING CONNECTOR TORQUE IS 8 lb-in (90 N-cm)
DO NOT EXCEED 12 lb-in (136 N-cm) AS DAMAGE TO CONNECTOR MAY RESULT.
3. VERIFICATION OF CHARACTERISTICS ARE IN REFERENCE WITH MIL-DTL-3928.
4. RECOMMENDED PULSE WIDTH DURATION FOR SWITCHING RELAY, 50-500 MILLISECONDS.

CHARACTERISTICS:

NOMINAL IMPEDANCE (OHM) -----	50			
FREQUENCY RANGE (GHz) -----	DC-4	4-8	8-12.4	12.4-18
V.S.W.R. (MAX) -----	1.2:1	1.3:1	1.4:1	1.5:1
INSERTION LOSS (dB MAX) -----	0.2	0.3	0.4	0.5
ISOLATION (dB MIN) -----	80	70	60	60
AVERAGE POWER (WATTS TYP) -----	85	55	45	35
TEMPERATURE RANGE (OPERATING) --	-40°C - +85°C			
TEMPERATURE RANGE (STORAGE) ----	-55°C - +100°C			
SWITCHING ACTION -----	BREAK BEFORE MAKE			
OPERATING VOLTAGE (OVER TEMP) --	10 - 14 Vdc			
SWITCHING VOLTAGE (MAX @ 25°C) -	8.5 Vdc			
ACTUATING CURRENT (mA MAX) ----	215 @ 12 Vdc & 25°C			
SWITCHING TIME (MAX) -----	15mSEC			
LIFE (MIN PER POSITION)-----	1 * 10 ^ 6 CYCLES			
INDICATOR CONTACT RATING:-----	5 WATTS TYP., 175V MAX., .25 A MAX			
WEIGHT (OZ) -----	1.4 NOM			

MATERIALS/FINISH:

HOUSING -----	ALUMINUM/NICKEL
COVER -----	ALUMINUM/BLACK ANODIZED
CONNECTORS ---	STAINLESS STEEL/PASSIVATE
INSULATION ---	TEFLON
CONTACTS -----	BERYLLIUM COPPER/GOLD
TERMINALS -----	Ni-Fe/Sn-70 SOLDER

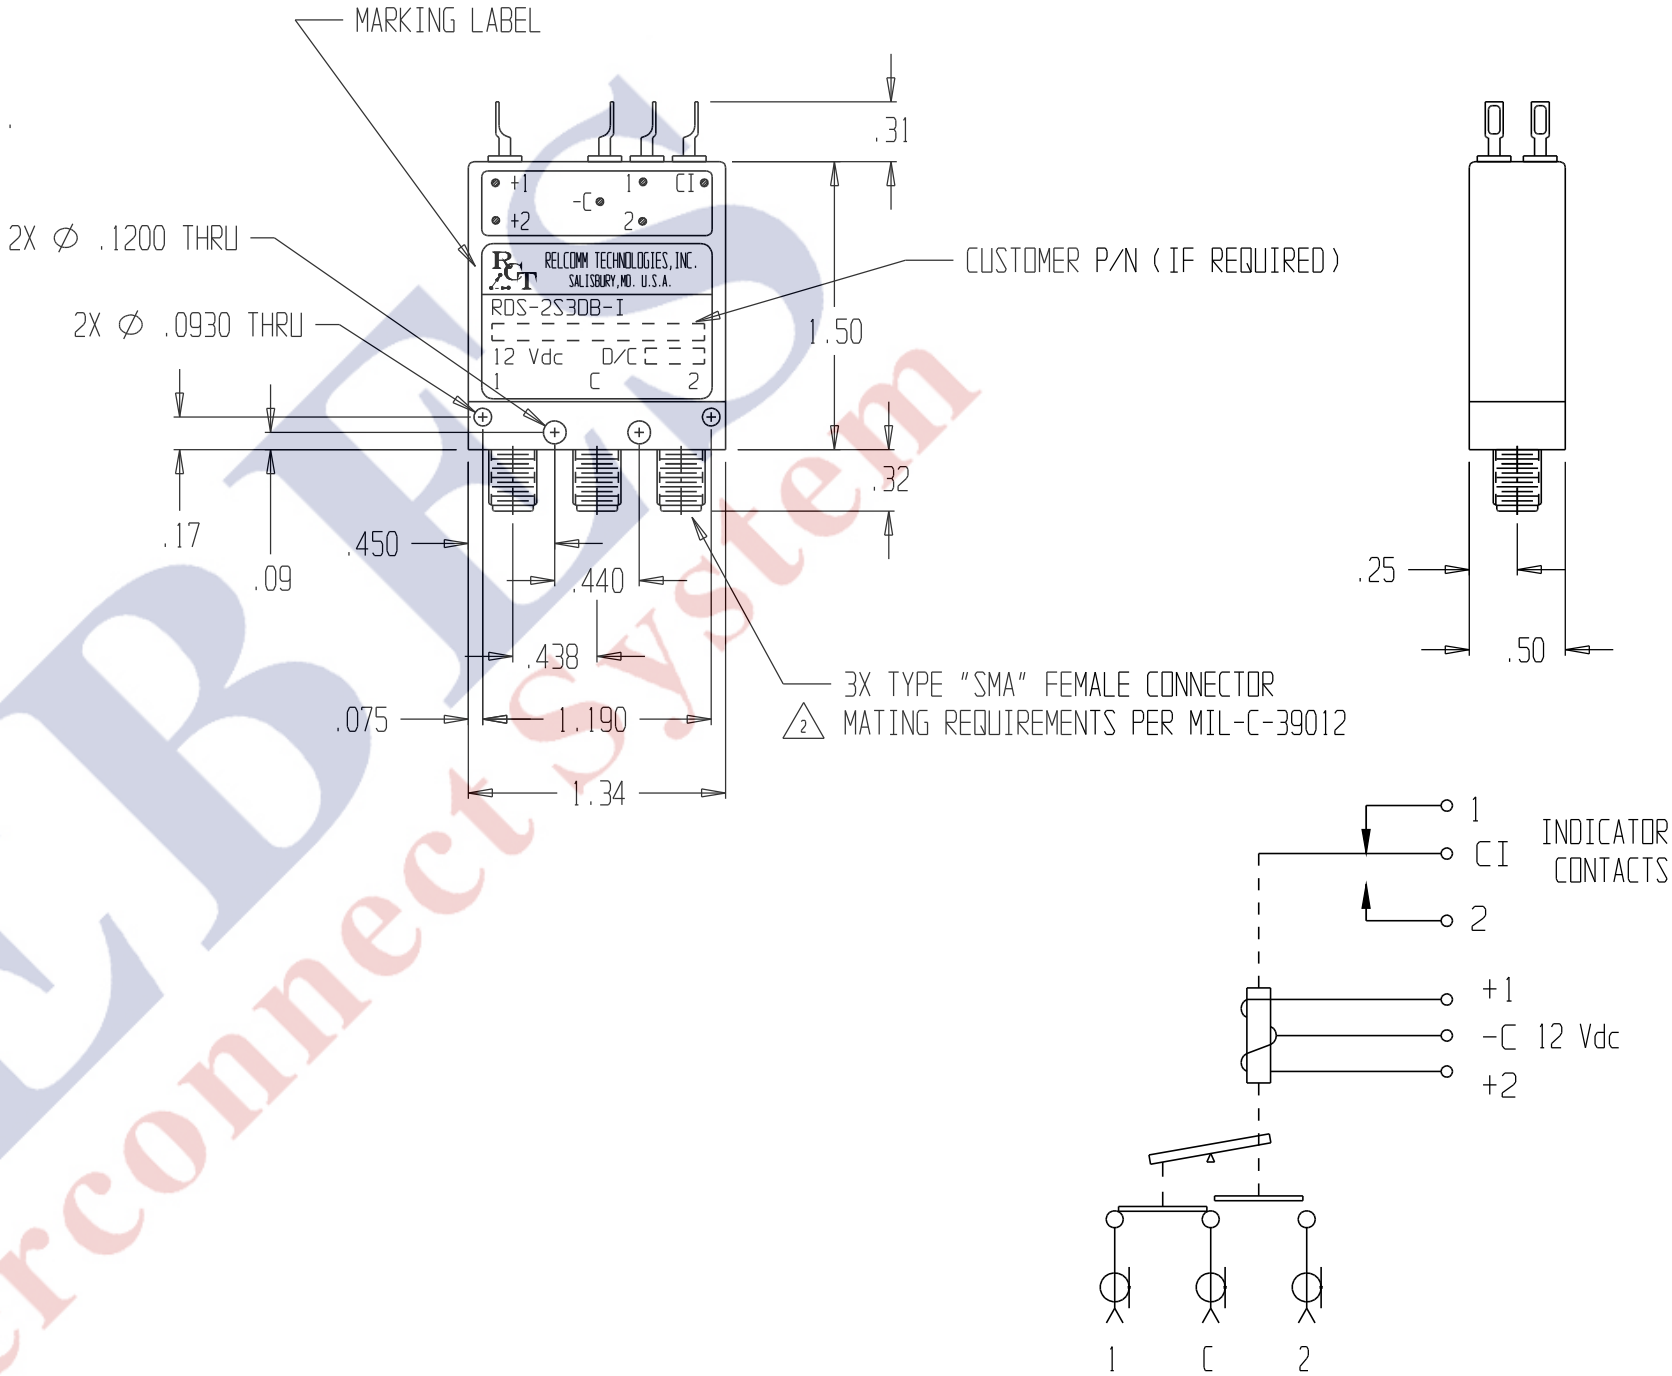

(SCHEMATIC SHOWN IN POSITION 1) (+1 LAST ENERGIZED)

				UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND INCLUDE PLATING. TOLERANCES .XX ±.02 FRACTIONS ± .XXX ±.010 SURFACE QUALITY .XXXX ±.0050 63/ MAX	DR M.MAGDA 4/13/95 CK J.LAPKE MM 10/16/96 ENG M.MAGDA 10/16/96 MFG QA	EXCELLENCE BY DESIGN	RELCOMM TECHNOLOGIES, INC. 610 BEAM STREET SALISBURY, MARYLAND 21801		
6	1515	6/10/08	A.MAGDA				COAXIAL 1P2T RELAY TITLE "PULSE LATCHING" W/INDICATORS		
5	1190	12/01/04	B.JONES			SIZE B	DWG NO.	RDS-2S3DB-I	REV 6
4	1083	7/30/03	M.MAGDA			SCALE 1 : 1		DO NOT SCALE DWG	SHEET 1 OF 1
3	987	10/14/02	C.LEWANDOWSKI						
2	137	9/30/96	M.MAGDA MM						
1	101	4/15/96	M.MAGDA MM						
REV	ECN NO.	DATE	APPROVAL						