

RF BAY, Inc.

www.rfbayinc.com


MPA-0850**MPA Series****750-950MHz 5W RF Power Amplifier****Features**

- Frequency Range: 750-950MHz
- Small Signal Gain: 40dB
- P_{out} : +37dBm
- IP3: +47dBm
- Noise Figure: 6dB
- DC Power: 9V
- SMA Connector

Performance measured @ 850MHz







Description

MPA-0850 is a 5Watt (+37dBm) output RF Power Amplifier operating from single 9V DC power supply with frequency from 750MHz to 950MHz.






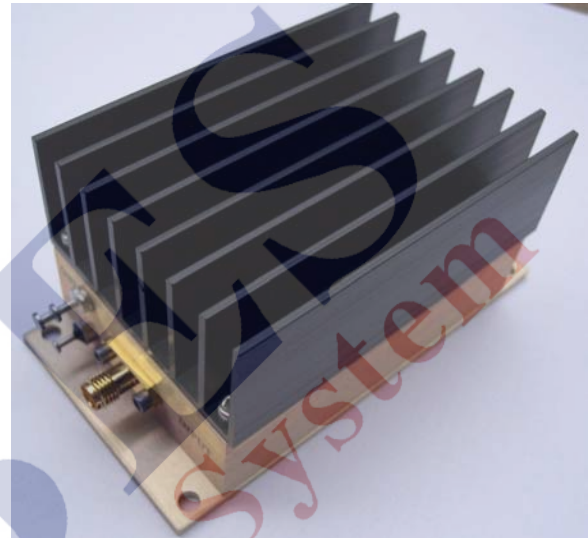
Picture**Electrical Specifications @ +25 °C, $Z_S = Z_L = 50 \Omega$, $V_{cc} = 9V$**

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	750		950
Small Signal Gain	dB		40	
Output Power P_{out} @ $P_{in} = 0dBm$	dBm		+37	
IP3	dBm		+47	
Reverse Isolation	dB		-70	
Noise Figure	dB		6.0	
Efficiency at $P_{out} = +37dBm$	%		37	
Input VSWR			2.0:1	
DC Power Supply	V		9	
Supply Current	mA		1650	
Size (Excluding SMA Connector)	inch	3.750" x 2.000" x 1.813"		
Weight	Oz.	8		




Typical Performance @ +25 °C

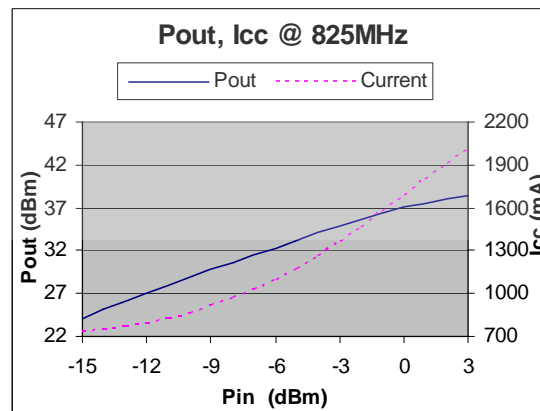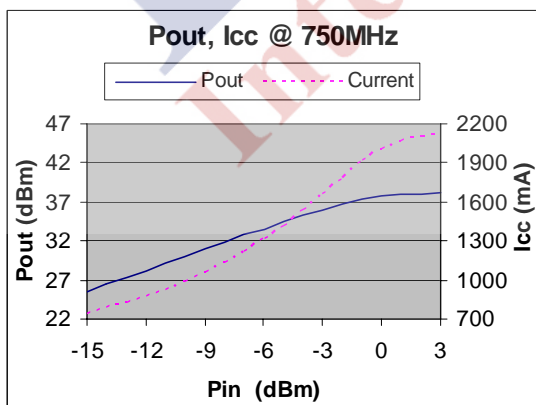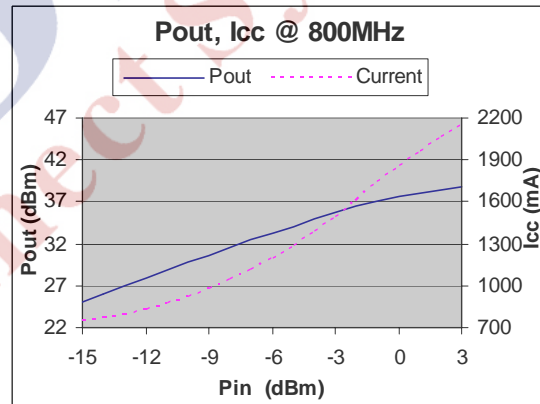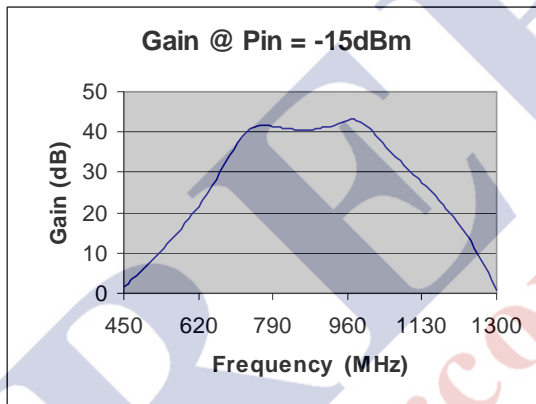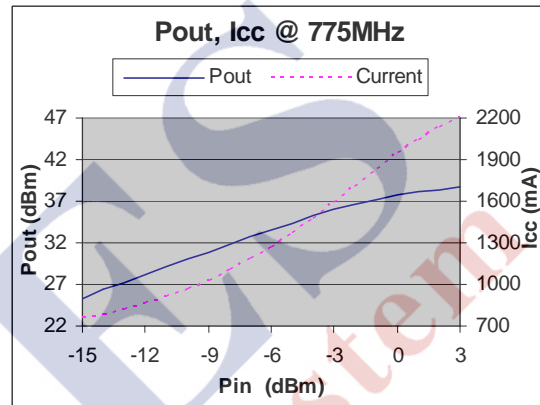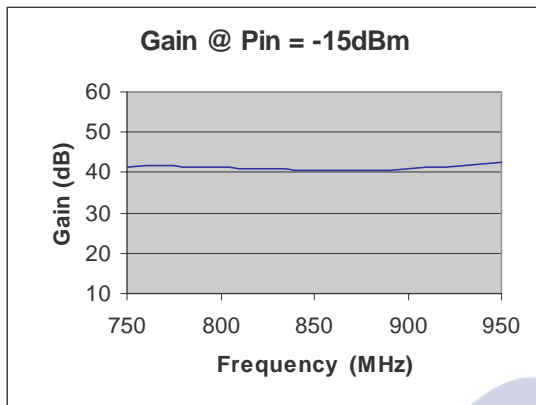

Typical Performance @ +25 °C

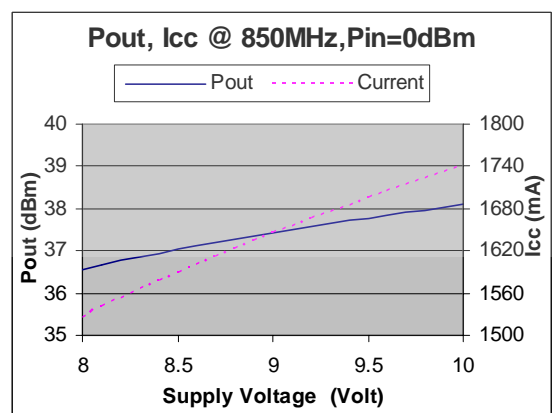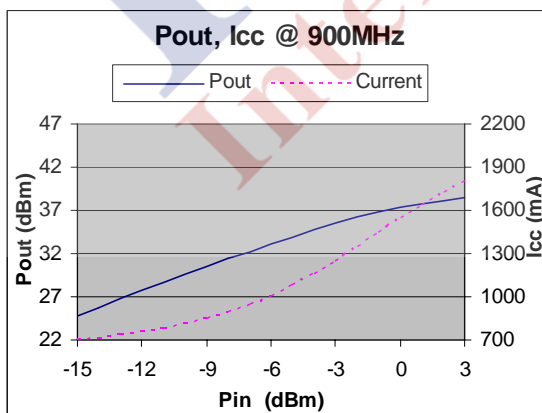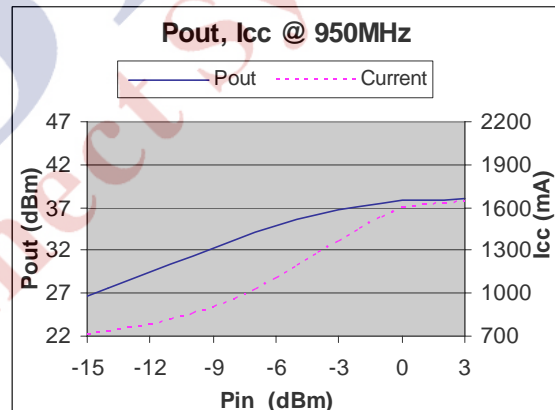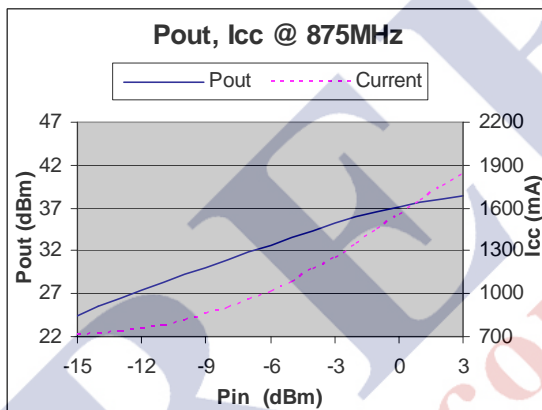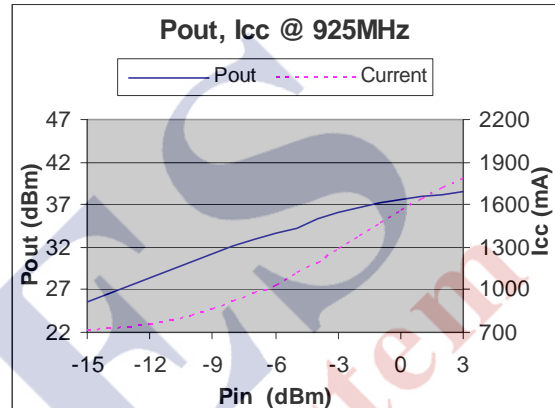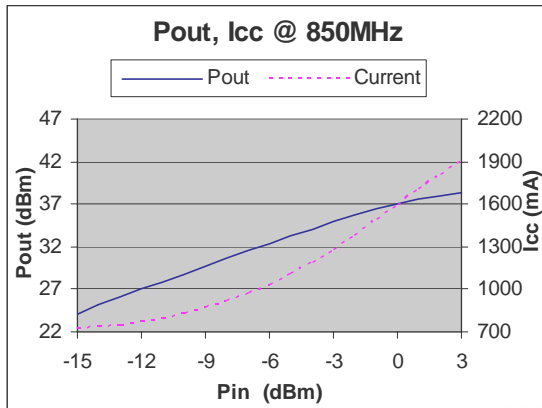

Typical Performance @ +25 °C

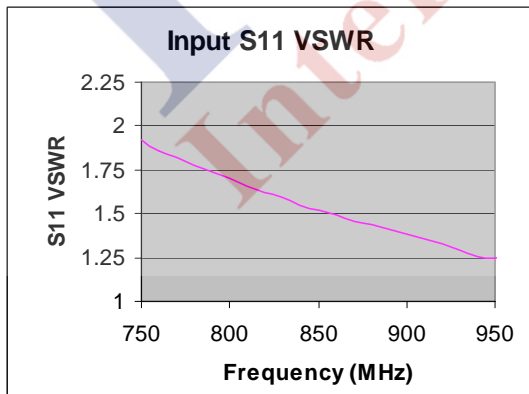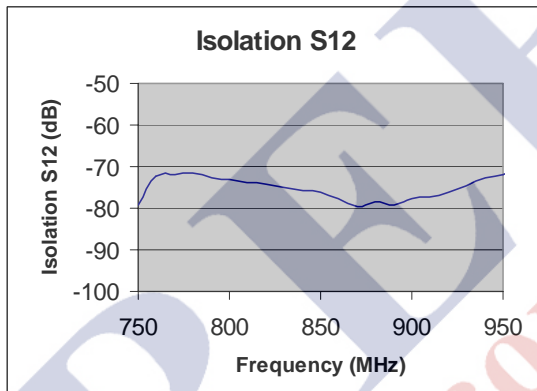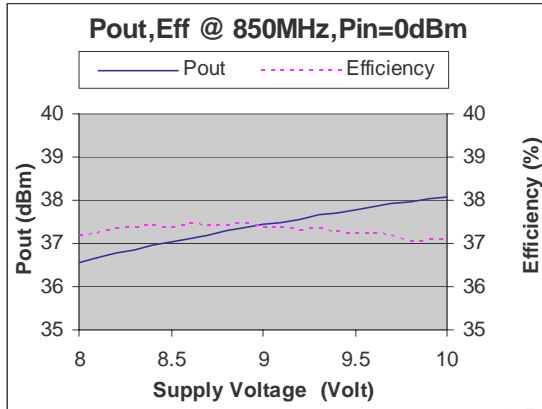

RF BAY, Inc.

www.rfbayinc.com

MPA-0850


MPA Series

750-950MHz 5W RF Power Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+12V
Operating Temperature	-30 °C to +65 °C
Storage Temperature	-55 °C to +100 °C

Outline

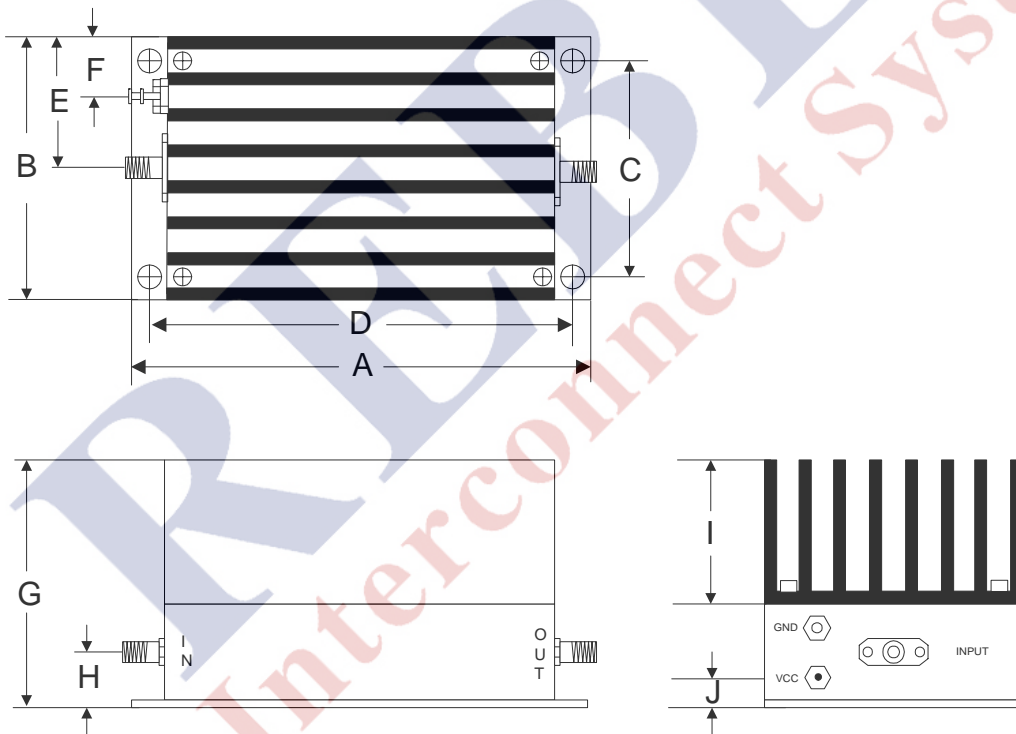

	A	B	C	D	E	F	G	H	I	J
Inch	3.750	2.000	1.750	3.400	1.000	0.400	1.813	0.375	1.000	0.238
mm	92.25	50.80	44.45	86.36	25.40	10.16	46.05	9.53	25.40	6.03